


Wall Framing

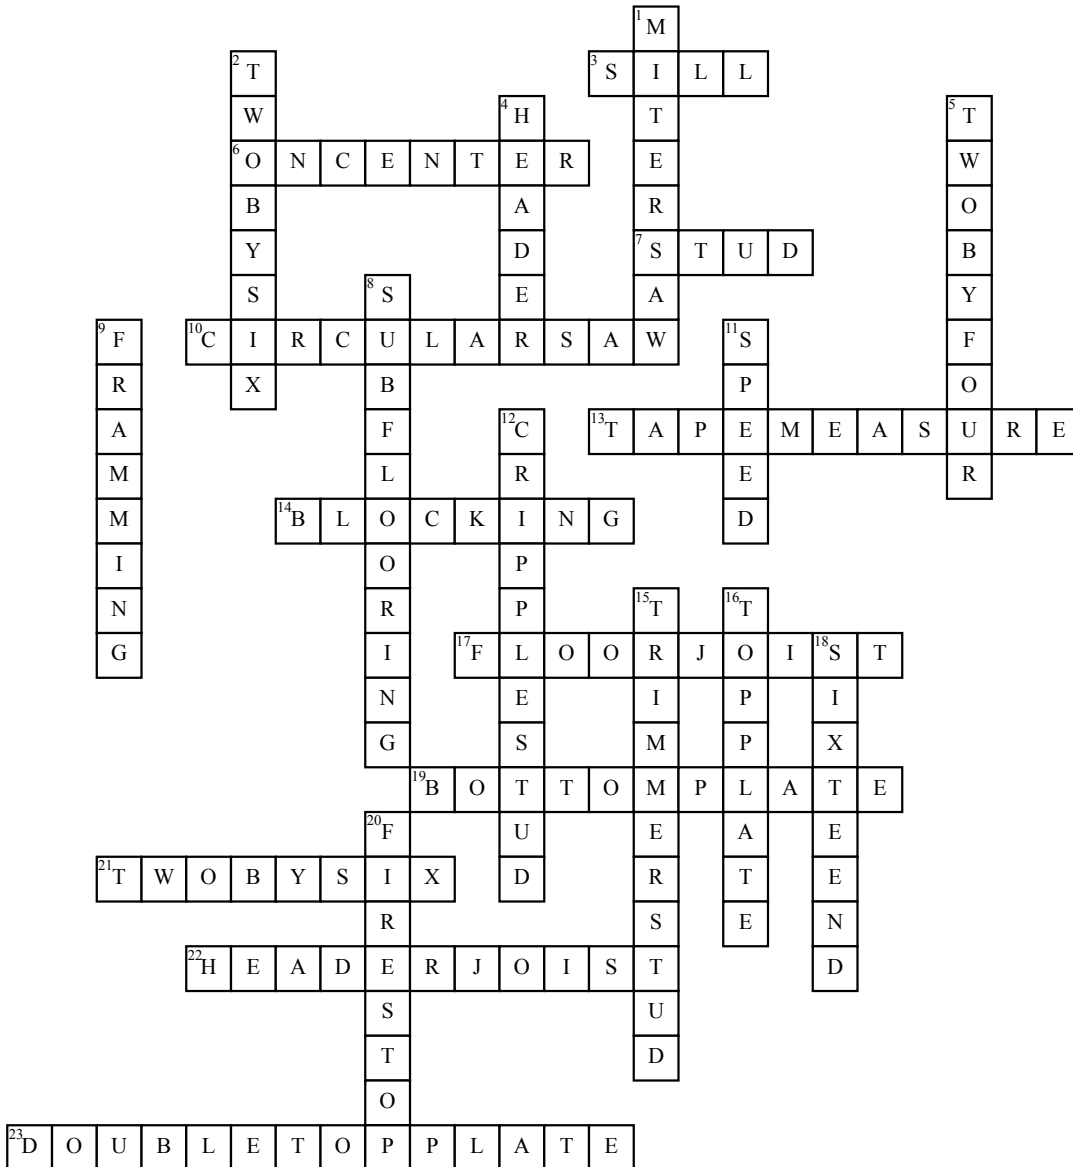

Across

- 3. horizontal framing member placed at the bottom of a window opening
- 6. studs are spaced 16" or 24"
- 7. full length vertical framing member
- 10. hand held saw used to cut the framing members
- 13. used to measure the framing members
- 14. provides extra nailing surface in the corners
- 17. framing member for the floor

Down

- 1. Stationary power saw used to cut the framing members
- 2. plumbing walls are framed with
- 4. placed above a window or door opening
- 5. interior walls are framed with
- 8. 3/4" plywood is used for this

- 9. what type of hammer is used in wall framing
- 11. type of square used in framing the walls
- 12. short vertical framing member either above a a door or above or below a window
- 15. this vertical framing member is used to hold up the header
- 16. horizontal framing member on the top of the wall
- 18. the nails used th put together the walls is
- 20. horizontal framing member placed in between the studs to prevent the spread of fire